AM4013MT




Zna?ka: Dino-Lite Kód produktu: AM4013MT

Short Description1.3 Megapixel resolutionRobust metal housing20-50x, 200x MagnificationGreat choice for generic applications

Popis

The Dino-Lite AM4013MT is a convenient, easy to use, professional handheld digital microscope providing superior image quality with up to 200x optical magnification.

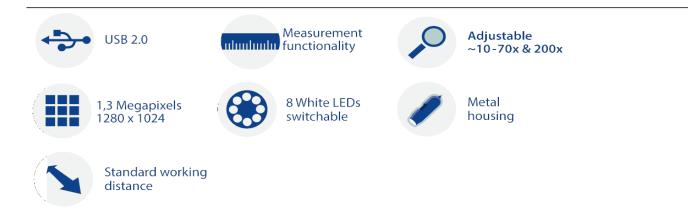

It is equipped with a high quality 1.3 Megapixels sensor with a crystal clear image quality and natural color reproduction, enabling you to view and capture objects with the greatest level of detail. This model comes with the DinoCapture 2.0 software for Windows and

DinoXcope software for MacOS, allowing you to do calibrated measurements on pictures taken with the Dino-Lite. The aluminum housing offers enhanced protection and durability and has the best look and feel.

| Working distance/field of view/depth of field | | | | | |
|---|----------|-----------------|----------|-----------------|--|
| MAGNIFICATI WORKING | | FIELD OF | FIELD OF | DEPTH OF | |
| ON RATE | DISTANCE | VIEW(X) | VIEW(Y) | FIELD | |
| 20 | 48.7 | 19.6 | 15.6 | 3.6 | |
| 30 | 21.7 | 13.0 | 10.4 | 1.9 | |
| 40 | 9.0 | 9.8 | 7.8 | | |
| 50 | 1.9 | 7.8 | 6.3 | 0.88 | |
| 60 | -2.3 | 6.5 | 5.2 | | |
| 220 | -0.1 | 1.8 | 1.4 | 0.2 | |
| 230 | 1.0 | 1.7 | 1.4 | | |
| 240 | 2.1 | 1.6 | 1.3 | | |
| Listed values | | | | Unit = mm | |
| may differ | | | | | |
| slightly | | | | | |

Specifikace

| Lighting | | | | |
|------------------------|---|--|--|--|
| Light/ LED type | White | | | |
| Number of LEDs | 8 | | | |
| LED on/off switchable: | Yes | | | |
| Infrared filter | IR cut-filter >650 nm | | | |
| Diffuser available | No | | | |
| Emission filter | No | | | |
| Polarizer | No | | | |
| Optics | | | | |
| Magnification | 20-50x, 200x | | | |
| Macro zoom | No | | | |
| Working distance | Standard | | | |
| Lens type | Glass with anti-reflection coating | | | |
| Sensor | | | | |
| Sensor type | CMOS | | | |
| Resolution | 1.3 Megapixel (1280x1024) | | | |
| Maximum frame rate | 30 fps | | | |
| Compatibility | | | | |
| Interface | USB 2.0 | | | |
| Operating system | Windows 7,8,10 & 11, MacOS 10.9 and up | | | |
| Software | DinoCapture 2.0 (Windows), DinoXcope (Mac | | | |

| | OS) | | |
|-------------------------|---|--|--|
| Supported image formats | BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, | | |
| (Windows) | PCX, MNG, WBMP, JP2, JPC, PGX | | |
| Supported video formats | WMV, FLV, SWF | | |
| (Windows) | | | |
| Supported image formats | JPEG, PNG | | |
| (MacOS) | | | |
| Supported video formats | MOV | | |
| (MacOS) | | | |
| Imaging standards | DirectShow, UVC | | |
| Wifi | Wireless-ready, requires the WF-10 WiFi streamer | | |
| | (optional) | | |
| Housing | | | |
| Housing material | Metal housing | | |
| Magnification lock | No | | |
| Dimensions | 10.5cm (L) x 3.2cm (D) | | |
| Weight | 140g | | |
| Cable length | 1.8m | | |
| Features | | | |
| Special feature | No | | |
| Measurement | Yes | | |
| Calibration | Yes | | |
| Microtouch sensor | Yes | | |
| ESD safe | Yes | | |
| Information | | | |
| Package contents | Microscope, Carry pouch, software CD, calibration | | |
| | target, user manual | | |
| Warranty information | 2 years European warranty | | |
| Regulatory approval | CE, FCC, ROHS | | |
| Price range | €350,00 - €550,00 | | |
| Product Gallery | | | |