Dino-Lite Europe - Phone: - Email:

# AM4013MTL-FVW

Zna?ka: Dino-Lite

Kód produktu: AM4013MTL-FVW




#### **Short Description**

1.3 Megapixel resolution Robust metal housing 395nm + white LEDs 10-90x magnification Long working distance

### **Popis**

The VW series has two types of LED lights that are switchable between white and UV light. This model has a long working distance and a filter to filter out the returning UV light so that an image with natural colors can be obtained. The aluminium housing offers enhanced protection and durability and has the best look and feel.

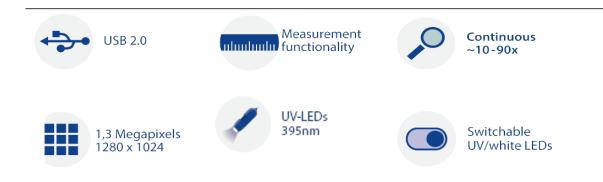






Working distance/field of view/depth of field					
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
<b>Listed values</b>				Unit = mm	
may differ					
slightly					
20	151.0	19.6	15.6	6	
30	101.0	13.0	10.4	3.4	
40	72.2	9.8	7.8	2.2	
50	64.1	7.8	6.3	1.65	
60	56.2	6.5	5.2	-	
70	51.3	5.6	4.5	-	
80	48.3	4.9	3.9	-	
90	46.6	4.3	3.5	0.8	

## **Special Light**

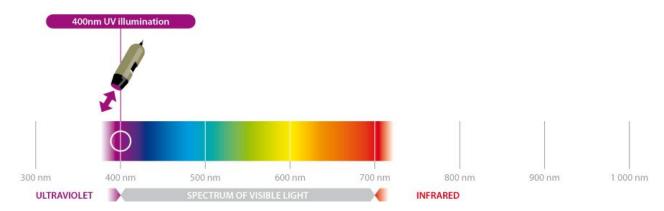

# Specifikace

•	
Lighting	
Light/ LED type	395 nm UV + white
Number of LEDs	4+4
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	No
Emission filter	Yes, UV cut filter
Polarizer	No
Optics	

Magnification	10-90x			
Macro zoom	No			
Working distance	Long			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	1.3 Megapixel (1280x1024)			
Maximum frame rate	30 fps			
Compatibility				
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up			
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			
Supported video formats	WMV, FLV, SWF			
(Windows)				
Supported image formats	JPEG, PNG			
(MacOS)				
Supported video formats	MOV			
(MacOS)				
Imaging standards	DirectShow, UVC			
Wifi	Wireless-ready, requires the WF-10 WiFi streamer			
	(optional)			
Housing				
Housing material	Metal housing			
Magnification lock	No			
Dimensions	10.5cm (L) x 3.2cm (D)			
Weight	140g			
Cable length	1.8m			
Features				
Special feature	No			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	Yes			
Information				
Package contents	Microscope, carry pouch, software CD, calibration			
	target, user manual			
Warranty information	2 years European warranty			
Regulatory approval	CE, FCC, ROHS			
Price range	€350,00 - €550,00			

# **Product Gallery**