Dino-Lite Europe - Phone: - Email:

AM4013MT



Marque: Dino-Lite


Code produit: AM4013MT

Courte description

1.3 Megapixel resolutionRobust metal housing20-50x, 200x MagnificationGreat choice for generic applications

Description

The Dino-Lite AM4013MT is a convenient, easy to use, professional handheld digital microscope providing superior image quality with up to 200x optical magnification.

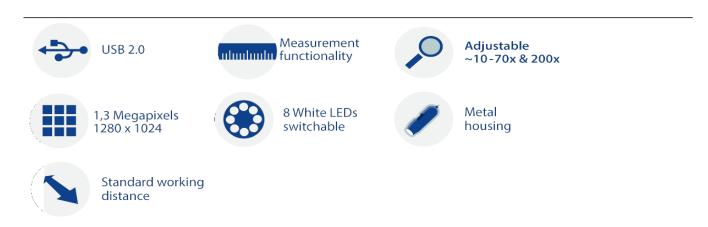

It is equipped with a high quality 1.3 Megapixels sensor with a crystal clear image quality and natural color reproduction, enabling you to view and capture objects with the greatest level of detail. This model comes with the DinoCapture 2.0 software for Windows and

DinoXcope software for MacOS, allowing you to do calibrated measurements on pictures taken with the Dino-Lite. The aluminum housing offers enhanced protection and durability and has the best look and feel.

Working distance/field of view/depth of field

MAGNIFICATI WORKING		FIELD OF	FIELD OF	DEPTH OF
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD
20	48.7	19.6	15.6	3.6
30	21.7	13.0	10.4	1.9
40	9.0	9.8	7.8	
50	1.9	7.8	6.3	0.88
60	-2.3	6.5	5.2	
220	-0.1	1.8	1.4	0.2
230	1.0	1.7	1.4	
240	2.1	1.6	1.3	
Listed values				Unit = mm
may differ				
slightly				

Spécification

Light/ LED type White Number of LEDs 8 LED on/off switchable: Yes Infrared filter IR cut-filter >650 nm Diffuser available No Emission filter No Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor Sensor type CMOS			
Number of LEDs LED on/off switchable: Infrared filter IR cut-filter >650 nm Diffuser available No Emission filter No Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor			
LED on/off switchable: Infrared filter IR cut-filter >650 nm Diffuser available No Emission filter No Optics Magnification Macro zoom Working distance Lens type Glass with anti-reflection coating Sensor			
Infrared filter IR cut-filter >650 nm Diffuser available No Emission filter No Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor			
Diffuser available Emission filter No Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Lens type Sensor			
Emission filter Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Lens type Glass with anti-reflection coating Sensor			
Polarizer No Optics Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor			
Optics Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor			
Magnification 20-50x, 200x Macro zoom No Working distance Standard Lens type Glass with anti-reflection coating Sensor			
Macro zoom Working distance Lens type Glass with anti-reflection coating Sensor			
Working distance Lens type Glass with anti-reflection coating Sensor			
Lens type Glass with anti-reflection coating Sensor			
Sensor			
Sensor type CMOS			
Resolution 1.3 Megapixel (1280x1024)			
Maximum frame rate 30 fps			
Compatibility			
Interface USB 2.0			
Operating system Windows 7,8,10 & 11, MacOS 10.9 and up			
Software DinoCapture 2.0 (Windows), DinoXcope (Mac			

	OS)		
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,		
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX		
Supported video formats (Windows)	WMV, FLV, SWF		
Supported image formats (MacOS)	JPEG, PNG		
Supported video formats (MacOS)	MOV		
Imaging standards	DirectShow, UVC		
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)		
Housing			
Housing material	Metal housing		
Magnification lock	No		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	140g		
Cable length	1.8m		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	Yes		
Information			
Package contents	Microscope, Carry pouch, software CD, calibration target, user manual		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€350,00 - €550,00		

Galerie du produit