Dino-Lite Europe - Phone: - Email:

# AM4115T-FUW - EDGE

Marca:

Codice del prodotto: AM4115T-FUW - EDGE




#### **Short Description**

1.3 Megapixel resolution
Versatility due to exchangeable caps
~375nm + white LEDs
20-220x magnification

#### **Descrizione**

The UW series has two types of LED lights that are switchable between white and UV light. This model has a filter to filter out the returning UV light so that an image with natural colors can be obtained.

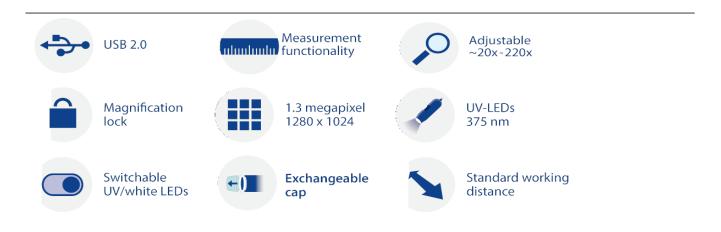


The Dino-Lite Edge models provide superior image quality and a high level of flexibility due to the adaptable cap design.

#### » Also available with 390-400nm LEDs (model AM4115T-FVW).

Working distance/field of view/depth of field					
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
<b>Listed values</b>	* Without front			Unit = mm	
may differ	cap				
slightly					
20	60.2	19.5	15.6	2.5	
30	33.5	13.0	10.4	1.8	
40	20.9	9.8	7.8	1.5	
50	13.9	7.8	6.3	-	
60	9.7	6.5	5.2	-	
70	7.1	5.6	4.5	1.0	
80	5.5	4.9	3.9	-	
90	4.5	4.3	3.5	-	
100	4.1	3.9	3.1	-	
110	4.0	3.6	2.8	-	
120	4.1	3.3	2.6	-	
130	4.5	3.0	2.4	-	
140	5.0	2.8	2.2	-	
150	5.6	2.6	2.1	-	
160	6.3	2.4	2.0	-	
170	7.1	2.3	1.8	-	
180	8.0	2.2	1.7	-	
190	8.9	2.1	1.6	-	
200	9.9	2.0	1.6	-	
210	10.9	1.9	1.5	-	
220	11.9	1.8	1.4	0.1	

## **Special Light**

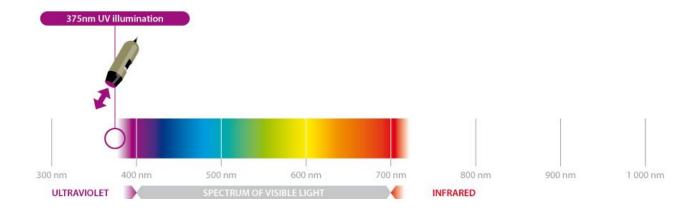

## Specifiche

Lighting	
Light/ LED type	~375 nm UV + white
Number of LEDs	4+4
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	Yes (N3C-D included)
Emission filter	Yes, Emission barrier filter 375 nm
Polarizer	No
Optics	
Magnification	20-220x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats (MacOS)	MOV

Imaging standards	DirectShow, UVC			
Wifi	Wireless-ready, requires the WF-10 WiFi streamer			
	(optional)			
Housing				
Housing material	Composite/ plastic housing			
Magnification lock	Yes			
Dimensions	10.5cm (L) x 3.2cm (D)			
Weight	100g			
Cable length	1.8m			
Features				
Special feature	No			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	No			
Information				
Package contents	Microscope, carry pouch, software CD, calibration			
	target, user manual			
Warranty information	2 years European warranty			
Regulatory approval	CE, FCC, ROHS			
Price range	€600,00 - €800,00			