Dino-Lite Europe - Phone: - Email:

# AM4115T-FVW - EDGE

### Marca:

Codice del prodotto: AM4115T-FVW - EDGE




### **Short Description**

1.3 Megapixel resolution Versatility due to exchangeable caps 395nm + white LEDs 20-220x magnification

#### **Descrizione**

The VW series has two types of LED lights that are switchable between white and UV light. This model has a filter to filter out the returning UV light so that an image with natural colors can be obtained.

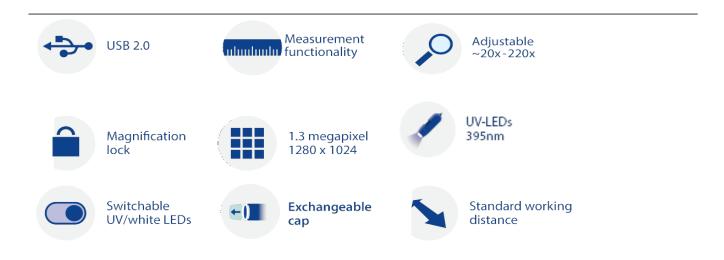


The Dino-Lite Edge models provide superior image quality and a high level of flexibility

due to the adaptable cap design.

### » Also available with 375nm LEDs (model AM4115T-FUW).

Working distance/field of view/depth of field					
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
<b>Listed values</b>	* Without front Unit = mm			Unit = mm	
may differ	cap				
slightly					
20	60.2	19.5	15.6	2.5	
30	33.5	13.0	10.4	1.8	
40	20.9	9.8	7.8	1.5	
50	13.9	7.8	6.3	-	
60	9.7	6.5	5.2	-	
70	7.1	5.6	4.5	1.0	
80	5.5	4.9	3.9	-	
90	4.5	4.3	3.5	-	
100	4.1	3.9	3.1	-	
110	4.0	3.6	2.8	-	
120	4.1	3.3	2.6	-	
130	4.5	3.0	2.4	-	
140	5.0	2.8	2.2	-	
150	5.6	2.6	2.1	-	
160	6.3	2.4	2.0	-	
170	7.1	2.3	1.8	-	
180	8.0	2.2	1.7	-	
190	8.9	2.1	1.6	-	
200	9.9	2.0	1.6	-	
210	10.9	1.9	1.5	-	
220	11.9	1.8	1.4	0.1	

## **Special Light:**

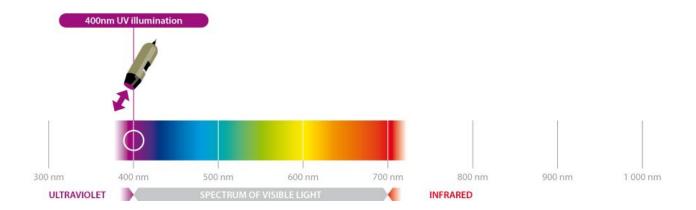

## Specifiche

Lighting	
Light/ LED type	395 nm UV + white
Number of LEDs	4+4
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	Yes (N3C-D included)
Emission filter	Yes, Emission barrier filter 375 nm
Polarizer	No
Optics	
Magnification	20-220x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats (MacOS)	MOV

T 1 1	P' d IIId		
Imaging standards	DirectShow, UVC		
Wifi	Wireless-ready, requires the WF-10 WiFi streamer		
	(optional)		
Housing			
Housing material	Composite/ plastic housing		
Magnification lock	Yes		
Dimensions	10.5cm (L) x 3.2cm (D)		
Weight	100g		
Cable length	1.8m		
Features			
Special feature	No		
Measurement	Yes		
Calibration	Yes		
Microtouch sensor	Yes		
ESD safe	No		
Information			
Package contents	Microscope, carry pouch, software CD, calibration		
	target, user manual		
Warranty information	2 years European warranty		
Regulatory approval	CE, FCC, ROHS		
Price range	€600,00 - €800,00		

# **Product Gallery**