

AM4115T-JV

Merk:

Productcode: AM4115T-JV





Korte omschrijving

1.3 Megapixel resolution
Switchable UV/IR LEDs
20-200x magnification
With exchangeable caps

Omschrijving

The AM4115T-JV features both IR (~940nm) and UV (~395nm) LED lighting in a single device. The Dino-Lite Edge models provide superior image quality and a high level of flexibility due to the adaptable cap design.

 USB 2.0	 Adjustable ~20x - 220x	 Magnification lock
 1.3 megapixel 1280 x 1024	 Infrared LEDs ~ 940nm	 UV-LEDs 400 nm
 Switchable UV/IR LEDs	 Standard working distance	 Exchangeable cap

Multiple lighting options provide the ability to view magnified objects under normal external lighting sources such as white light or under near IR, or UV lighting by simply

switching from one to the other. The IR can be use in document examination and new enhanced UV system provides improved fluorescence contrasting for use in forensics, biomedical or machine vision applications.

Working distance/field of view/depth of field


MAGNIFICATI ON RATE	WORKING DISTANCE*	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
20	60.2	19.5	15.6	2.5
30	33.5	13	10.4	1.8
40	20.9	9.8	7.8	1.5
50	13.9	7.8	6.3	
60	9.7	6.5	5.2	
70	7.1	5.6	4.5	1.0
80	5.5	4.9	3.9	
90	4.5	4.3	3.5	
100	4.1	3.9	3.1	
110	4	3.6	2.8	
120	4.1	3.3	2.6	
130	4.5	3	2.4	
140	5	2.8	2.2	
150	5.6	2.6	2.1	
160	6.3	2.4	2	
170	7.1	2.3	1.8	
180	8	2.2	1.7	
190	8.9	2.1	1.6	
200	9.9	2	1.6	
210	10.9	1.9	1.5	
220	11.9	1.8	1.4	0.1

**Listed values
may differ
slightly**

Unit = mm

Special Light

Special Light:

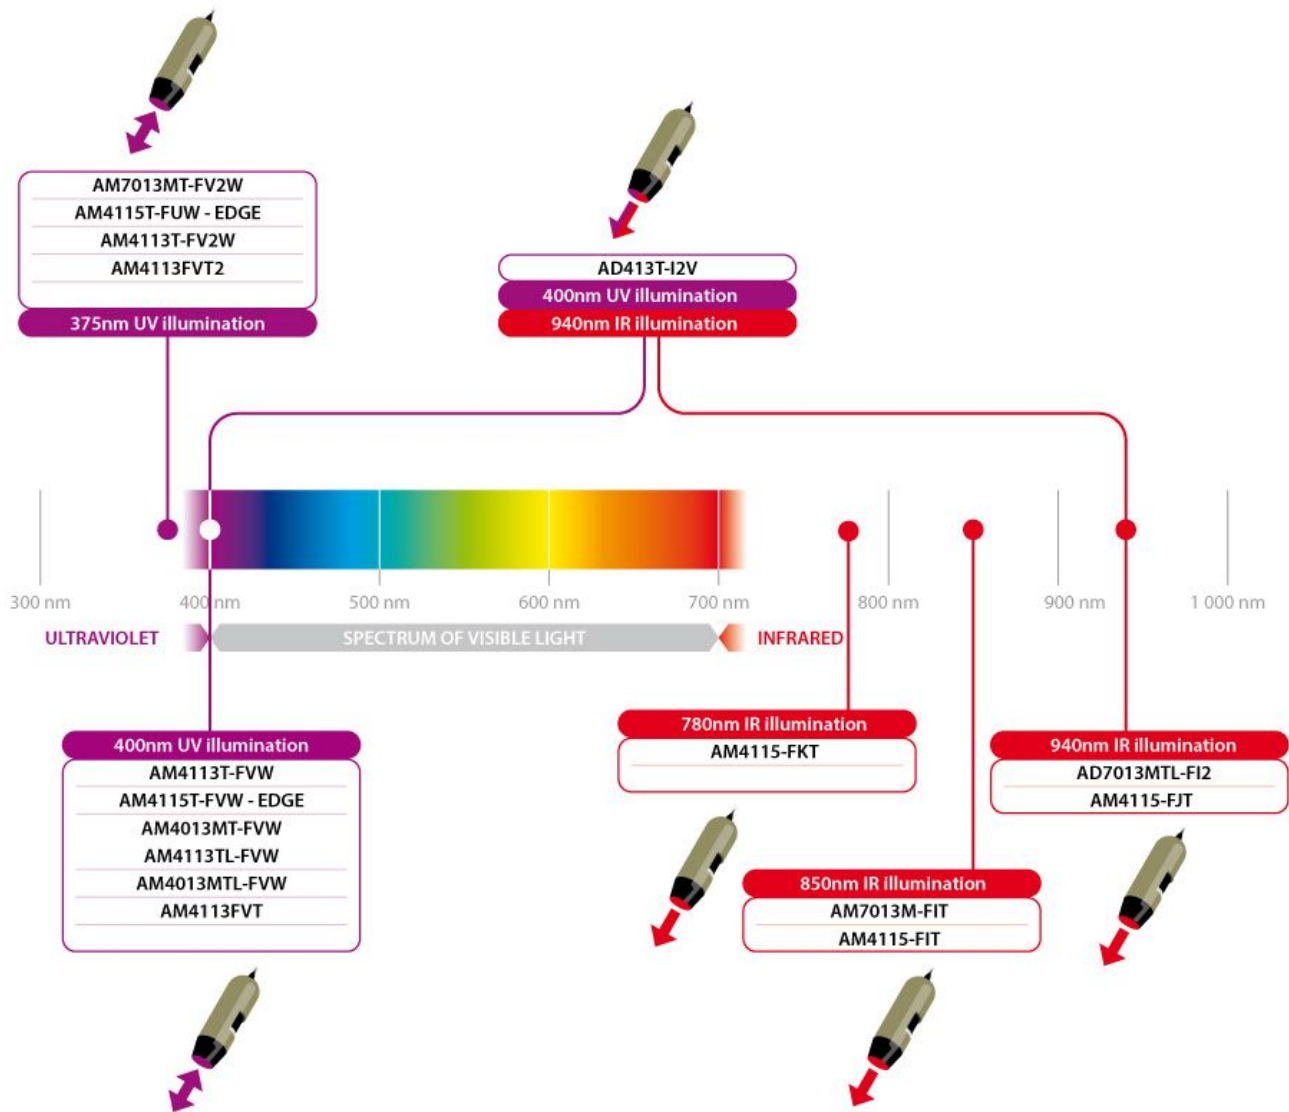

Specificatie

Verlichting	
Licht / LED-type	~395 nm UV + ~940 nm Infrared
Aantal leds	4+4
LED aan / uit schakelbaar:	Yes
Infrarood filter	No
Diffusor beschikbaar	No
Emissiefilter	No
Polarisator	No
Optiek	
Vergroting	20-220x
Macro zoom	No
Werkafstand	Standard
Type lens	Glass with anti-reflection coating
Sensor	

Sensortype	CMOS
Resolutie	1.3 Megapixel (1280x1024)
Maximale framesnelheid	30 fps
Compatibiliteit	
Interface	USB 2.0
Besturingssysteem	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXscope (Mac OS)
Ondersteunde beeldformaten (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Ondersteunde videoformaten (Windows)	WMV, FLV, SWF
Ondersteunde beeldformaten (MacOS)	JPEG, PNG
Ondersteunde videoformaten (MacOS)	MOV
Beeldvormingsnormen	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)
Behuizing	
Materiaal van de behuizing	Composite/ plastic housing
Vergrotingsslot	Yes
Afmetingen	10.5cm (L) x 3.2cm (D)
Gewicht	100g
Kabellengte	1.8m
Kenmerken	
Bijzonderheid	No
Meting	Yes
Kalibratie	Yes
Microtouch-sensor	Yes
ESD veilig	No
Informatie	
Inhoud van de verpakking	Microscope, carry pouch, software CD, calibration target, user manual
Garantie-informatie	2 years European warranty
Regelgevende goedkeuring	CE, FCC, ROHS
Prijsklasse	€600,00 - €800,00