Dino-Lite Europe - Phone: - Email:

AM4113T-FVW

Marka: Dino-Lite

Ürün Kodu: AM4113T-FVW




Short Description

1.3 Megapixel resolution395 nm + white LEDs10-70x & 200xm magnification


Aç?klama

The VW series has two types of LED lights that are switchable between white and UV light. This model has a filter to filter out the returning UV light so that an image with natural colors can be obtained.

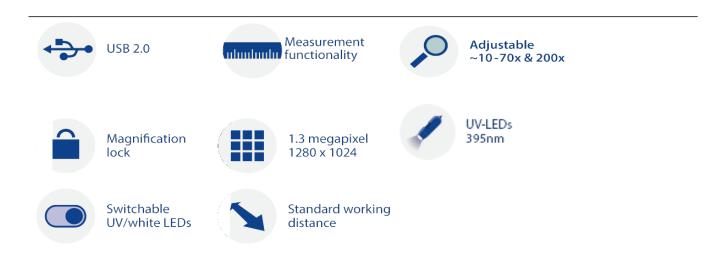

| Working distance/field of view/depth of field | | | | | |
|---|----------|----------|----------|-----------|--|
| MAGNIFICATI | WORKING | FIELD OF | FIELD OF | DEPTH OF | |
| ON RATE | DISTANCE | VIEW(X) | VIEW(Y) | FIELD | |
| Listed values | | | | Unit = mm | |
| may differ | | | | | |
| slightly | | | | | |
| 20 | 48.7 | 19.6 | 15.6 | 3.6 | |
| 30 | 21.7 | 13.0 | 10.4 | 1.9 | |
| 40 | 9.0 | 9.8 | 7.8 | - | |
| 50 | 1.9 | 7.8 | 6.3 | 0.88 | |
| 60 | -2.3 | 6.5 | 5.2 | - | |
| 220 | -0.1 | 1.8 | 1.4 | 0.20 | |
| 230 | 1.0 | 1.7 | 1.4 | - | |
| 240 | 2.1 | 1.6 | 1.3 | - | |

Special Light

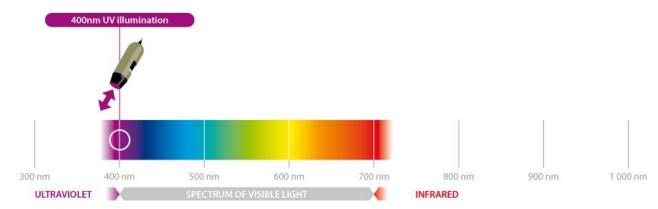

Özellikler

| Lighting | | | |
|------------------------|-------------------------------------|--|--|
| Light/ LED type | 395 nm UV + white | | |
| Number of LEDs | 4+4 | | |
| LED on/off switchable: | Yes | | |
| Infrared filter | IR cut-filter >650 nm | | |
| Diffuser available | No | | |
| Emission filter | Yes, Emission barrier filter 400 nm | | |
| Polarizer | No | | |
| Optics | | | |
| Magnification | 10-70x, 200x | | |
| Macro zoom | No | | |
| Working distance | Standard | | |
| Lens type | Glass with anti-reflection coating | | |
| Sensor | | | |

| Canaantru | CMOC | | | |
|-----------------------------------|---|--|--|--|
| Sensor type | CMOS | | | |
| Resolution | 1.3 Megapixel (1280x1024) | | | |
| Maximum frame rate | 30 fps | | | |
| Compatibility | LIGD 0 0 | | | |
| Interface | USB 2.0 | | | |
| Operating system | Windows 7, 8, 10 & 11, MacOS 10.9 and up | | | |
| Software | DinoCapture 2.0 (Windows), DinoXcope (Mac OS) | | | |
| Supported image formats | BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, | | | |
| (Windows) | PCX, MNG, WBMP, JP2, JPC, PGX | | | |
| Supported video formats (Windows) | WMV, FLV, SWF | | | |
| Supported image formats (MacOS) | JPEG, PNG | | | |
| Supported video formats (MacOS) | MOV | | | |
| Imaging standards | DirectShow, UVC | | | |
| Wifi | Wireless-ready, requires the WF-10 WiFi streamer | | | |
| | (optional) | | | |
| Housing | | | | |
| Housing material | Composite/ plastic housing | | | |
| Magnification lock | Yes | | | |
| Dimensions | 10.5cm (L) x 3.2cm (D) | | | |
| Weight | 105g | | | |
| Cable length | 1.8m | | | |
| Features | | | | |
| Special feature | No | | | |
| Measurement | Yes | | | |
| Calibration | Yes | | | |
| Microtouch sensor | Yes | | | |
| ESD safe | No | | | |
| Information | | | | |
| Package contents | Microscope, carry pouch, software CD, calibration | | | |
| 111 | target, user manual | | | |
| Warranty information | 2 years European warranty | | | |
| Regulatory approval | CE, FCC, ROHS | | | |
| Price range | €400,00 - €600,00 | | | |

Product Gallery





