Dino-Lite Europe - Phone: - Email:

AM4113T



Brand:


Product Code: AM4113T

Short Description

1.3 Megapixel resolutionWith magnification lock20-50x & 200x MagnificationGreat choice for generic applications

Description

The Dino-Lite AM4113T is a convenient, easy to use, professional handheld digital microscope providing superior image quality with up to 200x optical magnification.

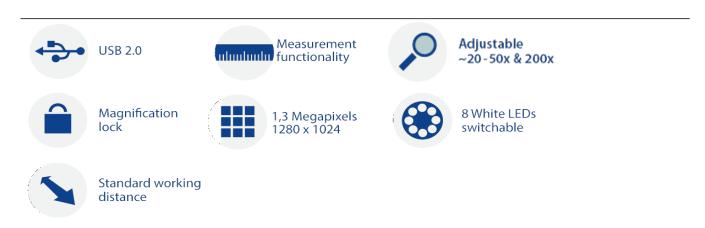

It is equipped with a high quality 1.3 Megapixels sensor with a crystal clear image quality and natural color reproduction, enabling you to view and capture objects with the greatest level of detail. This model comes with the DinoCapture 2.0 software for Windows and

DinoXcope software for MacOS, allowing you to do calibrated measurements on pictures taken with the Dino-Lite. The AM4113T is the most popular choice for quality inspection in industrial environments, education, office, or in the laboratory.

Working distance/field of view/depth of field

| MAGNIFICAT | TI WORKING | FIELD OF | FIELD OF | DEPTH OF |
|----------------------|-----------------|----------|----------|-----------------|
| ON RATE | DISTANCE | VIEW(X) | VIEW(Y) | FIELD |
| 20 | 48.7 | 19.6 | 15.6 | 3.6 |
| 30 | 21.7 | 13.0 | 10.4 | 1.9 |
| 40 | 9.0 | 9.8 | 7.8 | |
| 50 | 1.9 | 7.8 | 6.3 | 0.88 |
| 60 | -2.3 | 6.5 | 5.2 | |
| 220 | -0.1 | 1.8 | 1.4 | 0.2 |
| 230 | 1.0 | 1.7 | 1.4 | |
| 240 | 2.1 | 1.6 | 1.3 | |
| Listed values | | | | Unit = mm |
| may differ | | | | |

Specification

slightly

| Lighting | | | | |
|------------------------|---|--|--|--|
| Light/ LED type | White | | | |
| Number of LEDs | 8 | | | |
| LED on/off switchable: | Yes | | | |
| Infrared filter | IR cut-filter >650 nm | | | |
| Diffuser available | No | | | |
| Emission filter | No | | | |
| Polarizer | No | | | |
| Optics | | | | |
| Magnification | $20x \sim 50x, 200x$ | | | |
| Macro zoom | No | | | |
| Working distance | Standard | | | |
| Lens type | Glass with anti-reflection coating | | | |
| Sensor | | | | |
| Sensor type | CMOS | | | |
| Resolution | 1.3 Megapixel (1280x1024) | | | |
| Maximum frame rate | 30 fps | | | |
| Compatibility | | | | |
| Interface | USB 2.0 | | | |
| Operating system | Windows 7,8,10 & 11, MacOS 10.9 and up | | | |
| Software | DinoCapture 2.0 (Windows), DinoXcope (Mac | | | |

| P, GIF, PNG, JPG, TIF, RAS, PNM, TGA, K, MNG, WBMP, JP2, JPC, PGX IV, FLV, SWF | | |
|--|--|--|
| IV, FLV, SWF G, PNG | | |
| G, PNG | | |
| | | |
| | | |
| MOV | | |
| DirectShow, UVC | | |
| eless-ready, requires the WF-10 WiFi streamer ional) | | |
| | | |
| nposite/ plastic housing | | |
| Yes | | |
| 10.5cm (L) x 3.2cm (D) | | |
| g | | |
| n | | |
| | | |
| | | |
| | | |
| | | |
| Yes | | |
| No | | |
| | | |
| roscope, Carry pouch, software CD, calibration et, user manual | | |
| 2 years European warranty | | |
| CE, FCC, ROHS | | |
| €300,00 - €450,00 | | |
| | | |

Product Gallery

