# AM4115T-FVW - EDGE

Marke: Artikelnummer: AM4115T-FVW - EDGE




**Short Description** 

1.3 Megapixel resolutionVersatility due to exchangeable caps395nm + white LEDs20-220x magnification

#### Beschreibung

The VW series has two types of LED lights that are switchable between white and UV light. This model has a filter to filter out the returning UV light so that an image with natural colors can be obtained.

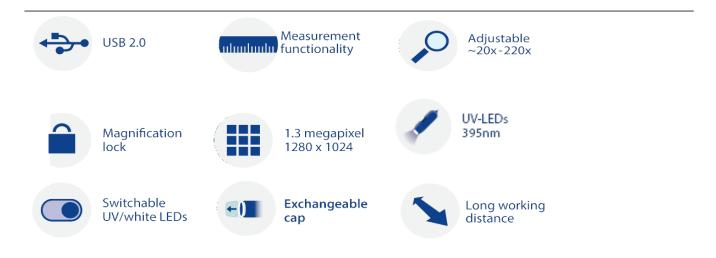


The Dino-Lite Edge models provide superior image quality and a high level of flexibility

due to the adaptable cap design.

# » Also available with 375nm LEDs (model AM4115T-FUW).

Working distance/field of view/depth of field					
MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF	
ON RATE	DISTANCE	VIEW(X)	VIEW(Y)	FIELD	
Listed values	* Without front			Unit = mm	
may differ	cap				
slightly					
20	(0, 2)	10.5	15 (	2.5	
20	60.2	19.5	15.6	2.5	
30	33.5	13.0	10.4	1.8	
40	20.9	9.8	7.8	1.5	
50	13.9	7.8	6.3	-	
60	9.7	6.5	5.2	-	
70	7.1	5.6	4.5	1.0	
80	5.5	4.9	3.9	-	
90	4.5	4.3	3.5	-	
100	4.1	3.9	3.1	-	
110	4.0	3.6	2.8	-	
120	4.1	3.3	2.6	-	
130	4.5	3.0	2.4	-	
140	5.0	2.8	2.2	-	
150	5.6	2.6	2.1	-	
160	6.3	2.4	2.0	-	
170	7.1	2.3	1.8	-	
180	8.0	2.2	1.7	-	
190	8.9	2.1	1.6	-	
200	9.9	2.0	1.6	-	
210	10.9	1.9	1.5	-	
220	11.9	1.8	1.4	0.1	

## Special Light:

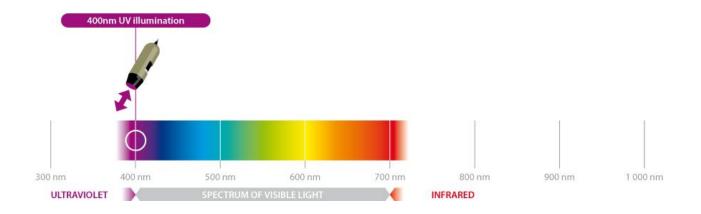

## Spezifikation

Lighting				
Light/ LED type	395 nm UV + white			
Number of LEDs	4+4			
LED on/off switchable:	Yes			
Infrared filter	IR cut-filter >650 nm			
Diffuser available	Yes (N3C-D included)			
Emission filter	Yes, Emission barrier filter 375 nm			
Polarizer	No			
Optics				
Magnification	20x ~ 220x			
Macro zoom	No			
Working distance	Standard			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	1.3 Megapixel (1280x1024)			
Maximum frame rate	30 fps			
Compatibility				
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up			
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			
Supported video formats	WMV, FLV, SWF			
(Windows)				
Supported image formats	JPEG, PNG			
(MacOS)				
Supported video formats (MacOS)	MOV			

Imaging standards	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer
	(optional)
Housing	
Housing material	Composite/ plastic housing
Magnification lock	Yes
Dimensions	10.5cm (L) x 3.2cm (D)
Weight	100g
Cable length	1.8m
Features	
Special feature	No
Measurement	Yes
Calibration	Yes
Microtouch sensor	Yes
ESD safe	No
Information	
Package contents	Microscope, carry pouch, software CD, calibration
	target, user manual
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€600,00 - €800,00
Product Gallery	

**Product Gallery**