Dino-Lite Europe - Phone: - Email:

# AM4115ZTL - EDGE



Marca:

Código del producto: AM4115ZTL


### **Short Description**

1.3 Megapixel resolution Versatility due to exchangeable caps 10-140x magnification Polarizer (anti-reflection) Long Working Distance (LWD)

### Descripción

The wide range of magnification (10-140x), the large field of view and working distance of up to 23 cm makes the AM4115ZTL the ideal solution for all situations where a longer distance between the microscope and the object is required or when it is needed to work under the microscope (repair, rework and assembly tasks etc.)

The built-in adjustable polarizer reduces glare and reflection on shiny objects.

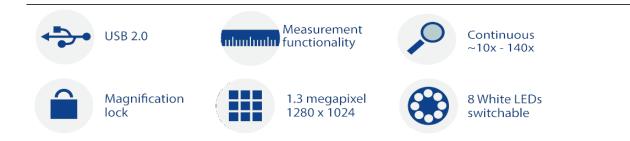







# Working distance/field of view/depth of field

MAGNIFICATI WORKING		FIELD OF	FIELD OF	<b>DEPTH OF</b>
ON RATE	<b>DISTANCE*</b>	VIEW(X)	VIEW(Y)	FIELD
10	234.5	39.0	31.2	12
20	112.5	19.5	15.6	4.5
30	72.5	13.0	10.4	3.1
40	54.5	9.8	7.8	1.8
50	43.5	7.8	6.2	1.2
60	37.5	6.5	5.2	0.9
70	33.7	5.6	4.5	0.6
80	31.3	4.9	3.9	0.5
90	29.9	4.3	3.5	0.37
100	29.2	3.9	3.1	0.28
110	29.1	3.5	2.8	0.22
120	29.3	3.3	2.6	0.17
130	29.8	3.0	2.4	0.12
140	30.5	2.8	2.2	0.09
Listed values may differ	* With front cap			Unit = mm
aliabtly				

slightly

### Especificación

Lighting			
Light/ LED type	White		
Number of LEDs	8		
LED on/off switchable:	Yes		
Infrared filter	IR cut-filter >650 nm		
Diffuser available	Yes (N3C-D included)		
Emission filter	No		
Polarizer	Yes, linear		
Optics			
Magnification	$10x \sim 140x$		
Macro zoom	No		

Working distance	Long	
Lens type	Glass with anti-reflection coating	
Sensor		
Sensor type	CMOS	
Resolution	1.3 Megapixel (1280x1024)	
Maximum frame rate	30 fps	
Compatibility		
Interface	USB 2.0	
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up	
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)	
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,	
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX	
Supported video formats (Windows)	WMV, FLV, SWF	
Supported image formats (MacOS)	JPEG, PNG	
Supported video formats (MacOS)	MOV	
Imaging standards	DirectShow, UVC	
Housing		
Housing material	Composite/ plastic housing	
Magnification lock	Yes	
Dimensions	10.5cm (L) x 3.2cm (D)	
Weight	105g	
Cable length	1.8m	
Features		
Special feature	No	
Measurement	Yes	
Calibration	Yes	
Microtouch sensor	Yes	
ESD safe	No	
Information		
Package contents	Microscope, carry pouch, software CD, calibration	
	target, user manual, N3C-O- Open cap, N3C-C-	
	Closed cap, N3C-D- Diffuser cap, N3C-E-	
	Extension cap, N3C-L- Long cap, N3C-S- Side	
	light cap	
Warranty information	2 years European warranty	
Regulatory approval	CE, FCC, ROHS	
Price range	€600,00 - €800,00	