

AM73515MT8A



Merk:

Productcode: AM73515MT8A

Korte omschrijving

5 Megapixel resolution

USB 3.0, maximum 45fps

700-900x Magnification

Coaxial and brightfield illumination


Flexible LED Control (FLC)

Automatic Magnification Reading (AMR)

Omschrijving

The AM73515MT8A is a 5MP Dino-Lite Edge Series USB 3.0 microscope that has a magnification range of 700-900x with built-in coaxial illumination. By using the Flexible LED Control (FLC), this model is capable of switching between or mixing, brightfield and coaxial illumination.

USB 3.0 adds a new transfer mode called "SuperSpeed" (SS) capable of transferring data up to 5Gbits/s (625MB/s). Dino-Lite models with USB 3.0 offer an image transfer speed of up to 45FPS at a 1280 x 960 resolution. SuperSpeed allows you to take advantage of the full power of the Dino-Lite Edge Series optics including improved colour accuracy and image quality.

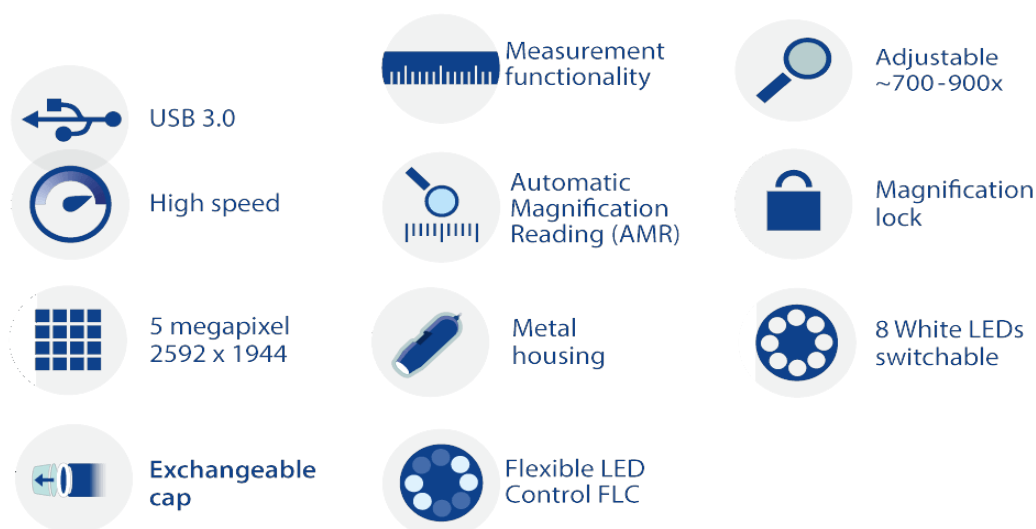

The coaxial illumination technique reveals details that are very difficult to see under normal light, for example when inspecting wafer plates, microchips or other microelectronics. The AM73515MT8A includes the Automatic Magnification Reading (AMR) feature which automatically detects and displays the magnification in the included Dino-Lite software. These unique features make the Dino-Lite AM73515MT8A a great inspection tool for material analysis, electronics inspection, or any similar application that requires high magnification, coaxial illumination, high speed, versatility and mobility. The Dino-Lite AM73515MT8A is bundled with the user-friendly DinoCapture 2.0 software for Windows.

For this model it includes functions such as Automatic Magnification Reading (AMR), Flexible LED Control (FLC), calibration, measurement, capturing & annotating images, and recording video. When focusing at such high magnification it is recommended to use a high-precision stand. The Dino-Lite RK-10A for example is a great add-on, it is a sturdy and stable high-end stand solution constructed of resilient stainless steel and lightweight aluminum and offers a very precise fine-focus adjustment.

Optical Data Table				
MAGNIFICATION RATE	WORKING DISTANCE*	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
700	6.4	0.56	0.400	0.01
750	6.3	0.52	0.375	0.01
800	6.1	0.48	0.350	0.009
850	6.0	0.46	0.330	0.009
900	5.9	0.43	0.315	0.008
Listed values	*Without front			Unit = mm

**may differ
slightly** **cap**

Specificatie

Verlichting	
Licht / LED-type	White
Aantal leds	8
LED aan / uit schakelbaar:	Yes
Infrarood filter	IR cut-filter >650 nm
Diffusor beschikbaar	No
Emissiefilter	No
Polarisator	No
Optiek	
Magnification	700x ~ 900x
Macro zoom	No
Werkafstand	Standard
Type lens	Glass with anti-reflection coating
Sensor	
Sensortype	CMOS
Resolutie	5 Megapixel (2560x1920)
Maximale framesnelheid	45fps (max 20fps video recording)
Compatibiliteit	
Interface	USB 3.0, Cable included**
Besturingssysteem	Windows 7, 8, 10 & 11, MacOS 10.11.16 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Ondersteunde beeldformaten (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Ondersteunde videoformaten (Windows)	WMV, FLV, SWF
Ondersteunde beeldformaten (MacOS)	JPEG, PNG
Ondersteunde videoformaten (MacOS)	MOV (max 1.3MP)
Beeldvormingsnormen	DirectShow, UVC
Wifi	No
Behuizing	
Materiaal van de behuizing	Metal housing
Vergrotingsslot	Yes

Afmetingen	11.9cm (L) x 3.3cm (H)
Gewicht	110g
Kabellengte	1.8m
Kenmerken	
Bijzonderheid	Automatic Magnification Reading (AMR), Flexible LED Control (FLC), Coaxial illumination
Meting	Yes
Kalibratie	Yes
Microtouch-sensor	Yes
ESD veilig	Yes
Informatie	
Inhoud van de verpakking	Microscope, carry pouch, software CD, user manual, quick guide, calibration target, front cover N3C-C, N3C-E, N3C-O
Garantie-informatie	2 years European warranty
Regelgevende goedkeuring	CMOS, UKCA – available upon request – marketing@dino-lite.eu
Prijsklasse	€1400,00 - €1600,00
Note	**Dino-Lite USB 3.0 models use a custom USB-A and USB-C cable that is specifically designed for Dino-Lite

Product galerij