

AM4517MT-BFCW



Merk:

Productcode: AM4517MT-BFCW

Korte omschrijving

1.3 Megapixel Edge sensor

High Sensitivity Sensor

Fluorescence


Automatic Magnification Readout (AMR)

Robust Metal Housing

Omschrijving

Detect a variety of fluorescence emissions with the AM4517MT-BFCW high-sensitivity 20x ~ 220x digital microscope. Equipped with 435 nm excitation lights and a 475 nm ~ 650 nm emission filter, this model captures clear images of samples labeled with fluorescent probes such as eCFP, Alexa Fluor 430, and Fura Red. This model features AMR to ease measurements.

Designed for precision fluorescence imaging, this system features a high-sensitivity sensor for detecting low fluorescence emissions, wide-ranging fluorescence detection with 435 nm excitation lights, and a 475–650 nm emission filter. A switchable white LED aids in target focusing, while Automatic Magnification Readout (AMR) ensures accurate measurements. Housed in a durable anodized aluminum alloy, it offers EMI shielding and resistance to impacts and abrasions.

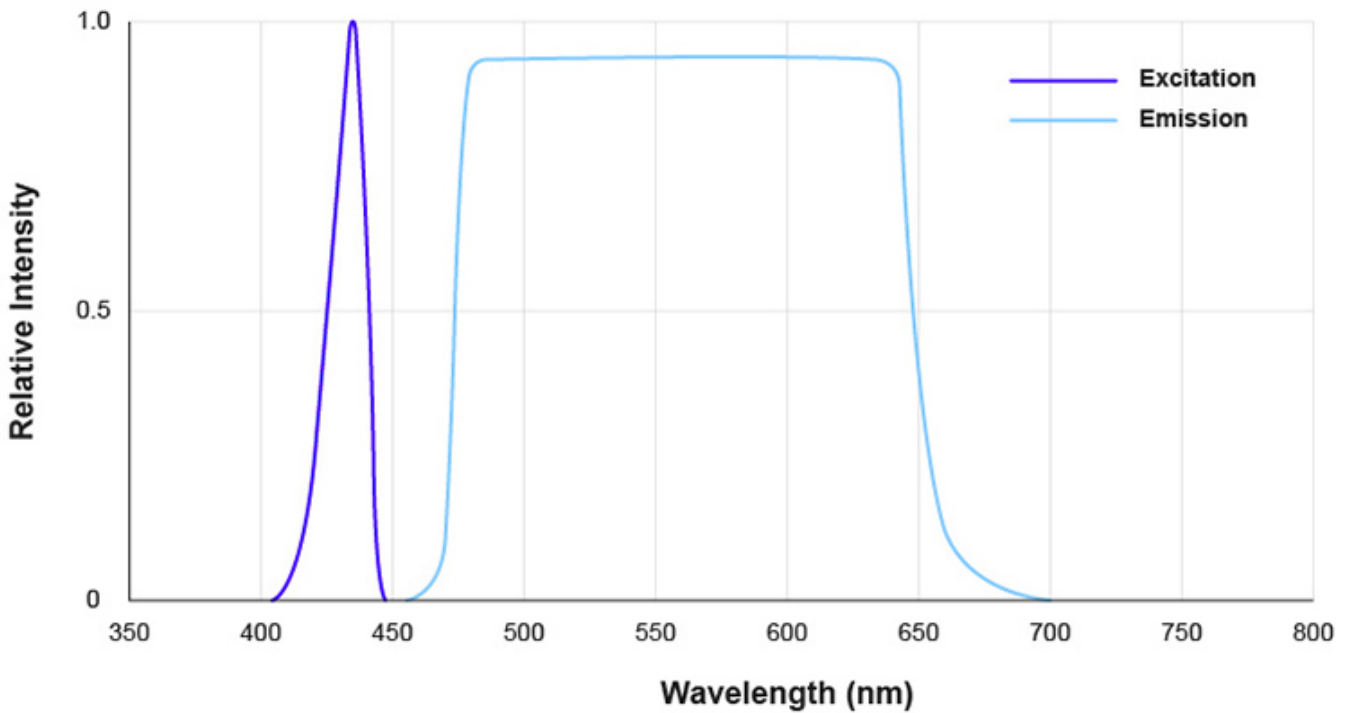

USB 2.0



1,3 Megapixels
1280 x 1024



Magnification
lock



Long working
distance



Exchangeable
cap



Automatic
Magnification
Reading (AMR)



Extended
Dynamic
Range EDR



Fluorescent
LEDs



Adjustable
~10-220x

The main features of the AM4517MT-BFCW are:

- 1.3 Megapixel
- High Sensitivity Sensor
- Wide-Ranging Fluorescence Detection
- Switchable White Light
- Automatic Magnification Readout (AMR)
- Robust Metal Housing

Optical Data Table

Magnification Rate	Working Distance *	Field of View(x)	Field of View(y)	Depth of Field
Listed values may differ slightly	* Without front cap			Unit = mm

20x	59.8	19.53	14.65	7.05
30x	33.1	13.02	9.77	3.36
40x	20.5	9.77	7.32	2.02
50x	13.4	7.81	5.86	1.38
60x	9.2	6.51	4.88	1.01
70x	6.7	5.58	4.19	0.79
80x	5.1	4.88	3.66	0.64
90x	4.1	4.34	3.26	0.53
100x	3.7	3.91	2.93	0.45
110x	3.6	3.55	2.66	0.39
120x	3.7	3.26	2.44	0.34
130x	4.1	3.01	2.25	0.30
140x	4.5	2.79	2.09	0.27
150x	5.2	2.60	1.95	0.25
160x	5.9	2.44	1.83	0.22
170x	6.7	2.30	1.72	0.21
180x	7.5	2.17	1.63	0.19
190x	8.5	2.06	1.54	0.18
200x	9.4	1.95	1.46	0.16
210x	10.5	1.86	1.40	0.15
220x	11.5	1.78	1.33	0.14

Specificatie

Verlichting	
Licht / LED-type	Excitation (?peak: 435 nm), 7 LEDs White Light, 1 LED
Licht / LED-type	2 years European warranty
Aantal leds	8
Optiek	
Magnification	20x ~ 220x
Sensor	
Resolutie	1.3 Megapixel (1280 x 960)
Maximale framesnelheid	30 fps at 1.3 MP, MJPEG 30 fps at VGA, MJPEG
Compatibiliteit	
Interface	USB 2.0
Besturingssysteem	Windows 10/11 macOS 10.14 or later
Ondersteunde beeldformaten (Windows)	DinoCapture 2.0: BMP, PNG, TIF, JPG DinoCapture 3.0: BMP, PNG, TIF, JPG
Ondersteunde videoformaten (Windows)	DinoCapture 2.0: WMV, FLV, SWF DinoCapture 3.0: WMV, MP4
Ondersteunde	DinoXcope: PNG, JPEG

beeldformaten (MacOS)	
Ondersteunde videoformaten (MacOS)	DinoXcope: MOV
Behuizing	
Vergrotingsslot	Yes
Afmetingen	104 mm (H) x 32 mm (D)
Gewicht	92 g
Kabellengte	1.8 m
Kenmerken	
Bijzonderheid	Automatic Magnification Readout (AMR)
Meting	Yes
Kalibratie	Yes
Microtouch-sensor	Yes
Informatie	
Inhoud van de verpakking	Microscope, carry pouch, calibration target, user manual, N3C-C (Close Cap), N3C-E (Extended Open Cap), N3C-LB (Black Long Cap), N3C-OB (Black Open Cap)
Regulatory approval:	CE, FCC, ROHS
Prijsklasse	€1050,00 - €1250,00

Product galerij

