

# AM4113FVT2

**Marka:** Dino-Lite  
**Ürün Kodu:** AM4113FVT2



## Short Description

1.3 Megapixel resolution

~375 nm UV LEDs

10-70x & 200x magnification

## Açıklama

The AM4113FVT2 has special lighting with LED's emitting UV light around the 375 nm spectrum.



USB 2.0



Measurement  
functionality



Adjustable  
~10-70x & 200x



Magnification  
lock



1.3 megapixel  
1280 x 1024



UV LEDs




Standard working  
distance

» Also available with ~400 nm LEDs (model AM4113FVT).

**Working distance/field of view/depth of field**

MAGNIFICATION RATE	WORKING DISTANCE	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
<b>Listed values may differ slightly</b>				<b>Unit = mm</b>
20	48.7	19.6	15.6	3.6
30	21.7	13.0	10.4	1.9
40	9.0	9.8	7.8	-
50	1.9	7.8	6.3	0.88
60	-2.3	6.5	5.2	-
220	-0.1	1.8	1.4	0.20
230	1.0	1.7	1.4	-
240	2.1	1.6	1.3	-

## Special Light

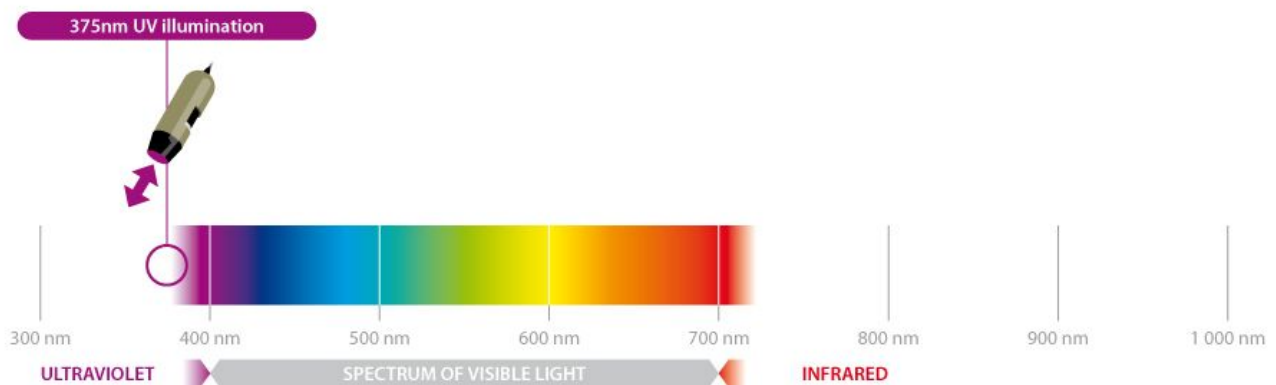

## Özellikler

Lighting	
Light/ LED type	~375 nm UV
Number of LEDs	4
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	No
Emission filter	Yes, Emission barrier filter 375 nm
Polarizer	No
Optics	
Magnification	10-70x, 200x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS

Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Included software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats (MacOS)	MOV
Imaging standards	DirectShow, UVC
Housing	
Housing material	Composite/ plastic housing
Magnification lock	Yes
Dimensions	10.5cm (L) x 3.2cm (D)
Weight	105g
Cable length	1.8m
Features	
Special feature	No
Measurement	Yes
Calibration	Yes
Microtouch sensor	Yes
ESD safe	No
Information	
Package contents	Microscope, carry pouch, software CD, calibration target, user manual
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€350,00 - €500,00

## Product Gallery