Dino-Lite Europe - Phone: - Email:

AM4115T-DFRW

Marca:

Código del producto: AM4115T-DFRW




Short Description

1.3 Megapixel resolution620nm excitation and 650nm emission filter20-220x magnificationTo observe Cy5

Descripción

The Dino-Lite AM4115T-DFRW digital microscope is optimized for research and viewing fluorescent objects by using 620nm excitation LEDs. It has a long-pass type 650nm emission filter that is designed to observe a wide range of fluorophores with applications in developmental biology, pathology, and anatomy.

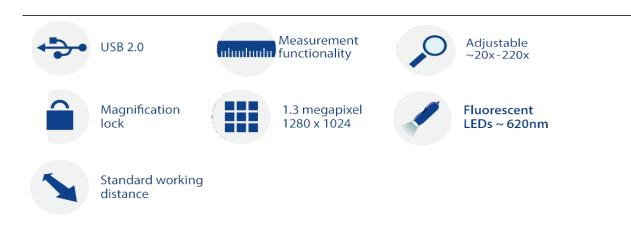


The AM4115T-DFRW has the capability of switching the light source from the 620nm

excitation LEDs to the white LED, which is convenient for locating the object and obtaining an easy focus. All of these factors make the AM4115T-DFRW the smallest fluorescence microscope in the world, capable of many applications and visualizing a vast range of fluorescence.

» Special models available on request.

Working distance/field of view/depth of field						
MAGNIFICATI	working distance	FIELD OF	FIELD OF	DEPTH OF		
ON RATE		VIEW(X)	VIEW(Y)	FIELD		
Listed values	* Without front			Unit = mm		
may differ	cap					
slightly						
20	60.2	19.5	15.6	2.5		
30	33.5	13.0	10.4	1.8		
40	20.9	9.8	7.8	1.5		
50	13.9	7.8	6.3	-		
60	9.7	6.5	5.2	-		
70	7.1	5.6	4.5	1.0		
80	5.5	4.9	3.9	-		
90	4.5	4.3	3.5	-		
100	4.1	3.9	3.1	-		
110	4.0	3.6	2.8	-		
120	4.1	3.3	2.6	-		
130	4.5	3.0	2.4	-		
140	5.0	2.8	2.2	-		
150	5.6	2.6	2.1	-		
160	6.3	2.4	2.0	-		
170	7.1	2.3	1.8	-		
180	8.0	2.2	1.7	-		
190	8.9	2.1	1.6	-		
200	9.9	2.0	1.6	-		
210	10.9	1.9	1.5	-		
220	11.9	1.8	1.4	0.1		

Special Light

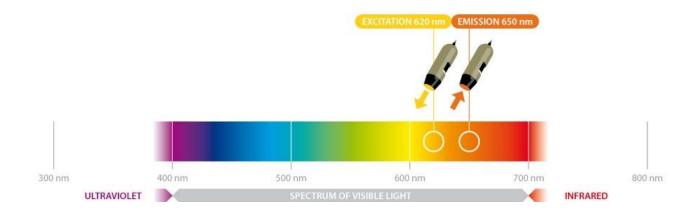

Especificación

Especification			
Lighting			
Light/ LED type	620nm excitation + white		
Number of LEDs	7 FL + 1 White		
LED on/off switchable:	Yes		
Infrared filter	No		
Diffuser available	No		
Emission filter	650nm, LP		
Polarizer	No		
Fluorophores	Cy5		
Optics			
Magnification	20-220x		
Macro zoom	No		
Working distance	Standard		
Lens type	Glass with anti-reflection coating		
Sensor			
Sensor type	CMOS		
Resolution	1.3 Megapixel (1280x1024)		
Maximum frame rate	30 fps		
Compatibility			
Interface	USB 2.0		
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up		
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)		
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,		
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX		
Supported video formats (Windows)	WMV, FLV, SWF		
Supported image formats (MacOS)	JPEG, PNG		
Supported video formats	MOV		

(MacOS)				
Imaging standards	DirectShow, UVC			
Wifi	Wireless-ready, requires the WF-10 WiFi streamer			
	(optional)			
Housing				
Housing material	Composite/ plastic housing			
Magnification lock	Yes			
Dimensions	10.5cm (L) x 3.2cm (D)			
Weight	100g			
Cable length	1.8m			
Features				
Special feature	No			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	No			
Information				
Package contents	Microscope, carry pouch, software CD, calibration			
	target, user manual			
Warranty information	2 years European warranty			
Regulatory approval	CE, FCC, ROHS			
Price range	€700,00 - €900,00			