

# AM4115T-GFBW

**Značka:**

**Kód produktu:** AM4115T-GFBW



## Short Description

1.3 Megapixel resolution

480nm excitation and 510nm emission filter

20-220x magnification

To observe GFP, FITC

## Popis

The Dino-Lite AM4115T-GFBW digital microscope is optimized for research and viewing fluorescent objects by using 480nm LEDs. It has a 510nm emission filter that is designed to observe including but not limited to GFP (green fluorescent protein).



USB 2.0



Measurement  
functionality



Adjustable  
~20x-220x



Magnification  
lock



1.3 megapixel  
1280 x 1024



Fluorescent  
LEDs ~ 480nm



Standard working  
distance

Compared to the traditional fluorescence microscope's band-pass type of emission filters, the Dino-Lite's long-pass type emission filter provides visibility and sensitivity over a


larger range of the fluorescence wavelength. Green fluorescent objects pop out under the microscope and you can clearly see its green glow. The AM4115T-GFBW has the capability of switching the light source from the 480nm excitation LED's to the white LED which is convenient for locating the object and obtaining an easy focus.

» *Special models available on request.*

**Working distance/field of view/depth of field**

MAGNIFICATION RATE	WORKING DISTANCE	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
Listed values may differ slightly	* Without front cap			Unit = mm
20	60.2	19.5	15.6	2.5
30	33.5	13.0	10.4	1.8
40	20.9	9.8	7.8	1.5
50	13.9	7.8	6.3	-
60	9.7	6.5	5.2	-
70	7.1	5.6	4.5	1.0
80	5.5	4.9	3.9	-
90	4.5	4.3	3.5	-
100	4.1	3.9	3.1	-
110	4.0	3.6	2.8	-
120	4.1	3.3	2.6	-
130	4.5	3.0	2.4	-
140	5.0	2.8	2.2	-
150	5.6	2.6	2.1	-
160	6.3	2.4	2.0	-
170	7.1	2.3	1.8	-
180	8.0	2.2	1.7	-
190	8.9	2.1	1.6	-
200	9.9	2.0	1.6	-
210	10.9	1.9	1.5	-
220	11.9	1.8	1.4	0.1

**Special Light**

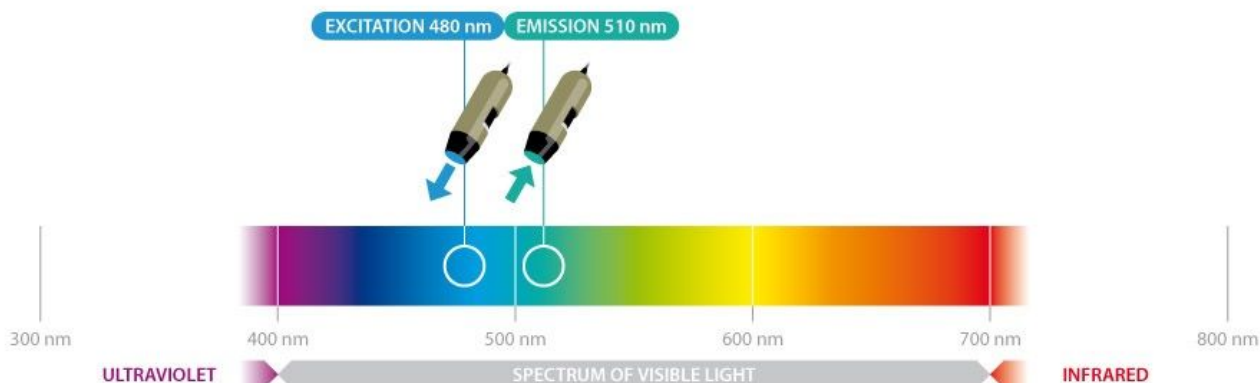

## Specifikace

Lighting	
Light/ LED type	480nm excitation + white
Number of LEDs	7 FL + 1 White
LED on/off switchable:	Yes
Infrared filter	No
Diffuser available	No
Emission filter	510nm, LP
Polarizer	No
Fluorophores	GFP, FITC
Optics	
Magnification	20x ~ 220x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats	MOV

(MacOS)	
Imaging standards	DirectShow, UVC
<b>Housing</b>	
Housing material	Composite/ plastic housing
Magnification lock	Yes
Dimensions	10.5cm (L) x 3.2cm (D)
Weight	100g
Cable length	1.8m
<b>Features</b>	
Special feature	No
Measurement	Yes
Calibration	Yes
Microtouch sensor	Yes
ESD safe	No
<b>Information</b>	
Package contents	Microscope, carry pouch, calibration target, user manual, N3C-C (Close Cap) N3C-EB (Extended Open Black Cap) N3C-LB (Black Long Cap) N3C-OB (Black Open Cap)
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€700,00 - €900,00

## Product Gallery

