

# AM7915MZT

**Marca:**

**Código del producto:** AM7915MZT



## Short Description

5 Megapixel resolution  
Extended Depth of Field (EDOF)  
Extended Dynamic Range (EDR)  
Flexible LED Control (FLC)  
10-220x magnification

## Descripción

With the use of the latest, cutting-edge optics, a brand new 5 megapixel sensor and several special features, the Dino-Lite AM7915MZT is a marvel of technology and the best choice for the high-demanding professional. The Dino-Lite AM7915MZT offers superb image quality and color reproduction in a robust, compact and appealing housing.



USB 2.0



Adjustable  
~10-220x



5 megapixel  
2592 x 1944




Standard working  
distance



Measurement  
functionality



Extended  
Depth Of Field  
EDOF

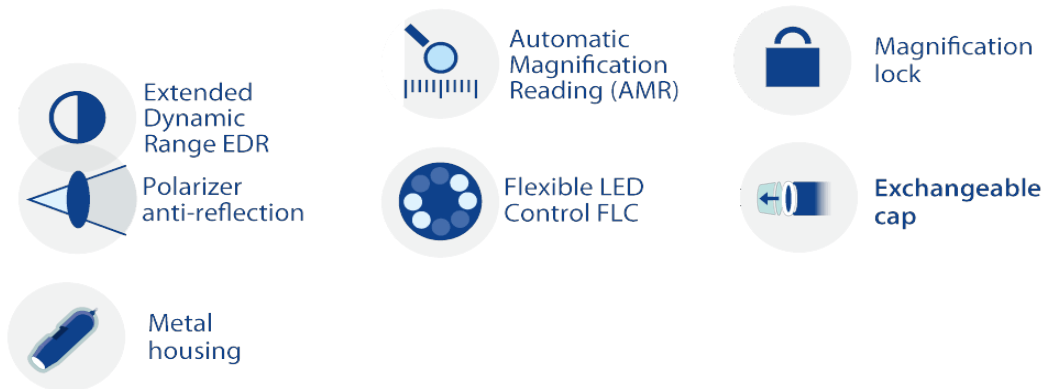

With the Extended Dynamic Range (EDR) feature, the details of darker or brighter areas within the object can be revealed by stacking images at different exposure levels. The Extended Depth of Field (EDOF) feature automatically stacks images at different focus level to improve the depth of field on rough or uneven surfaces. With the built-in Automatic Magnification Reading (AMR), measurements can be performed easily and quickly. Because of the built-in polarization filter this model is ideal when working with shiny or reflective objects such as metal, plastic, glass, jewelry, electronics, etc.

**The main features of the AM7915MZT are:**

- 5 Megapixel Edge sensor
- Extended Depth of Field (EDOF)
- Extended Dynamic Range (EDR)
- 10-220x magnification
- Adjustable polarizer
- Flexible LED Control (FLC)
- And more...

*(\*EDOF/EDR only functions under Windows OS)*

**Working distance/field of view/depth of field**

<b>MAGNIFICATION RATE</b>	<b>WORKING DISTANCE *</b>	<b>FIELD OF VIEW(X)</b>	<b>FIELD OF VIEW(Y)</b>	<b>DEPTH OF FIELD</b>
10	-	142.6	39.6	29.7
20	52.7	60.1	19.5	15.6

<b>30</b>	33.5	13.0	9.7	1.8
<b>40</b>	20.9	9.8	7.3	1.5
<b>50</b>	13.9	7.8	5.8	
<b>60</b>	9.7	6.5	4.8	
<b>70</b>	7.1	5.6	4.2	1.0
<b>80</b>	5.5	4.9	3.6	
<b>90</b>	4.5	4.3	3.2	
<b>100</b>	4.1	3.9	2.9	
<b>110</b>	4.0	3.6	2.7	
<b>120</b>	4.1	3.3	2.4	
<b>130</b>	4.5	3.0	2.2	
<b>140</b>	5.0	2.8	2.1	
<b>150</b>	5.6	2.6	1.9	
<b>160</b>	6.3	2.4	1.8	
<b>170</b>	7.1	2.3	1.7	
<b>180</b>	8.0	2.2	1.6	
<b>190</b>	8.9	2.1	1.5	
<b>200</b>	9.9	2.0	1.5	
<b>210</b>	10.9	1.9	1.4	
<b>220</b>	11.9	1.8	1.3	0.1
<b>Listed values may differ slightly * Without front cap</b>				<b>Unit = mm</b>

## Especificación

<b>Lighting</b>	
Light/ LED type	White
Number of LEDs	8
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	Yes (N3C-D included)
Emission filter	No
Polarizer	Yes, linear
<b>Optics</b>	
Magnification	10x ~ 220x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
<b>Sensor</b>	
Sensor type	CMOS

Resolution	5 Megapixel (2592x1944)
Maximum frame rate	30 fps
<b>Compatibility</b>	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.9 and up
Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	PNG, JPEG
Supported video formats (MacOS)	MOV (max 1.3MP)
Imaging standards	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)
<b>Housing</b>	
Housing material	Metal housing
Magnification lock	Yes
Dimensions	10.5cm (L) x 3.2cm (D)
Weight	138g
Cable length	1.8m
<b>Features</b>	
Special feature	Automatic Magnification Reading (AMR), Extended Dynamic Range (EDR), Extended Depth of Field (EDOF), Flexible LED Control (FLC).
Measurement	Yes
Calibration	Yes
Microtouch sensor	Yes
ESD safe	Yes
<b>Information</b>	
Package contents	Microscope, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- Diffuser cap, N3C-E- Extension cap, N3C-L- Long cap, N3C-S- Side light cap
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€1100,00 - €1300,00

## Product Gallery



